
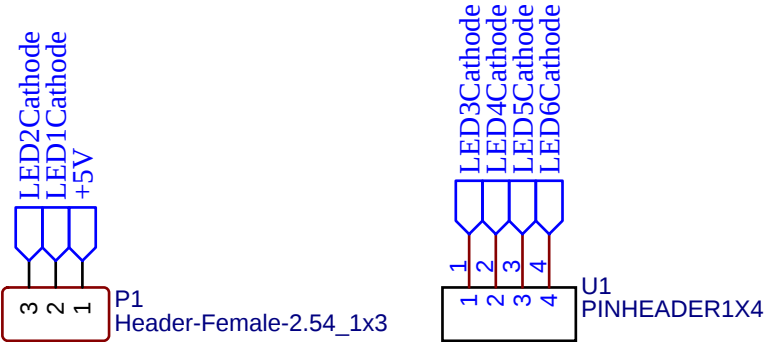


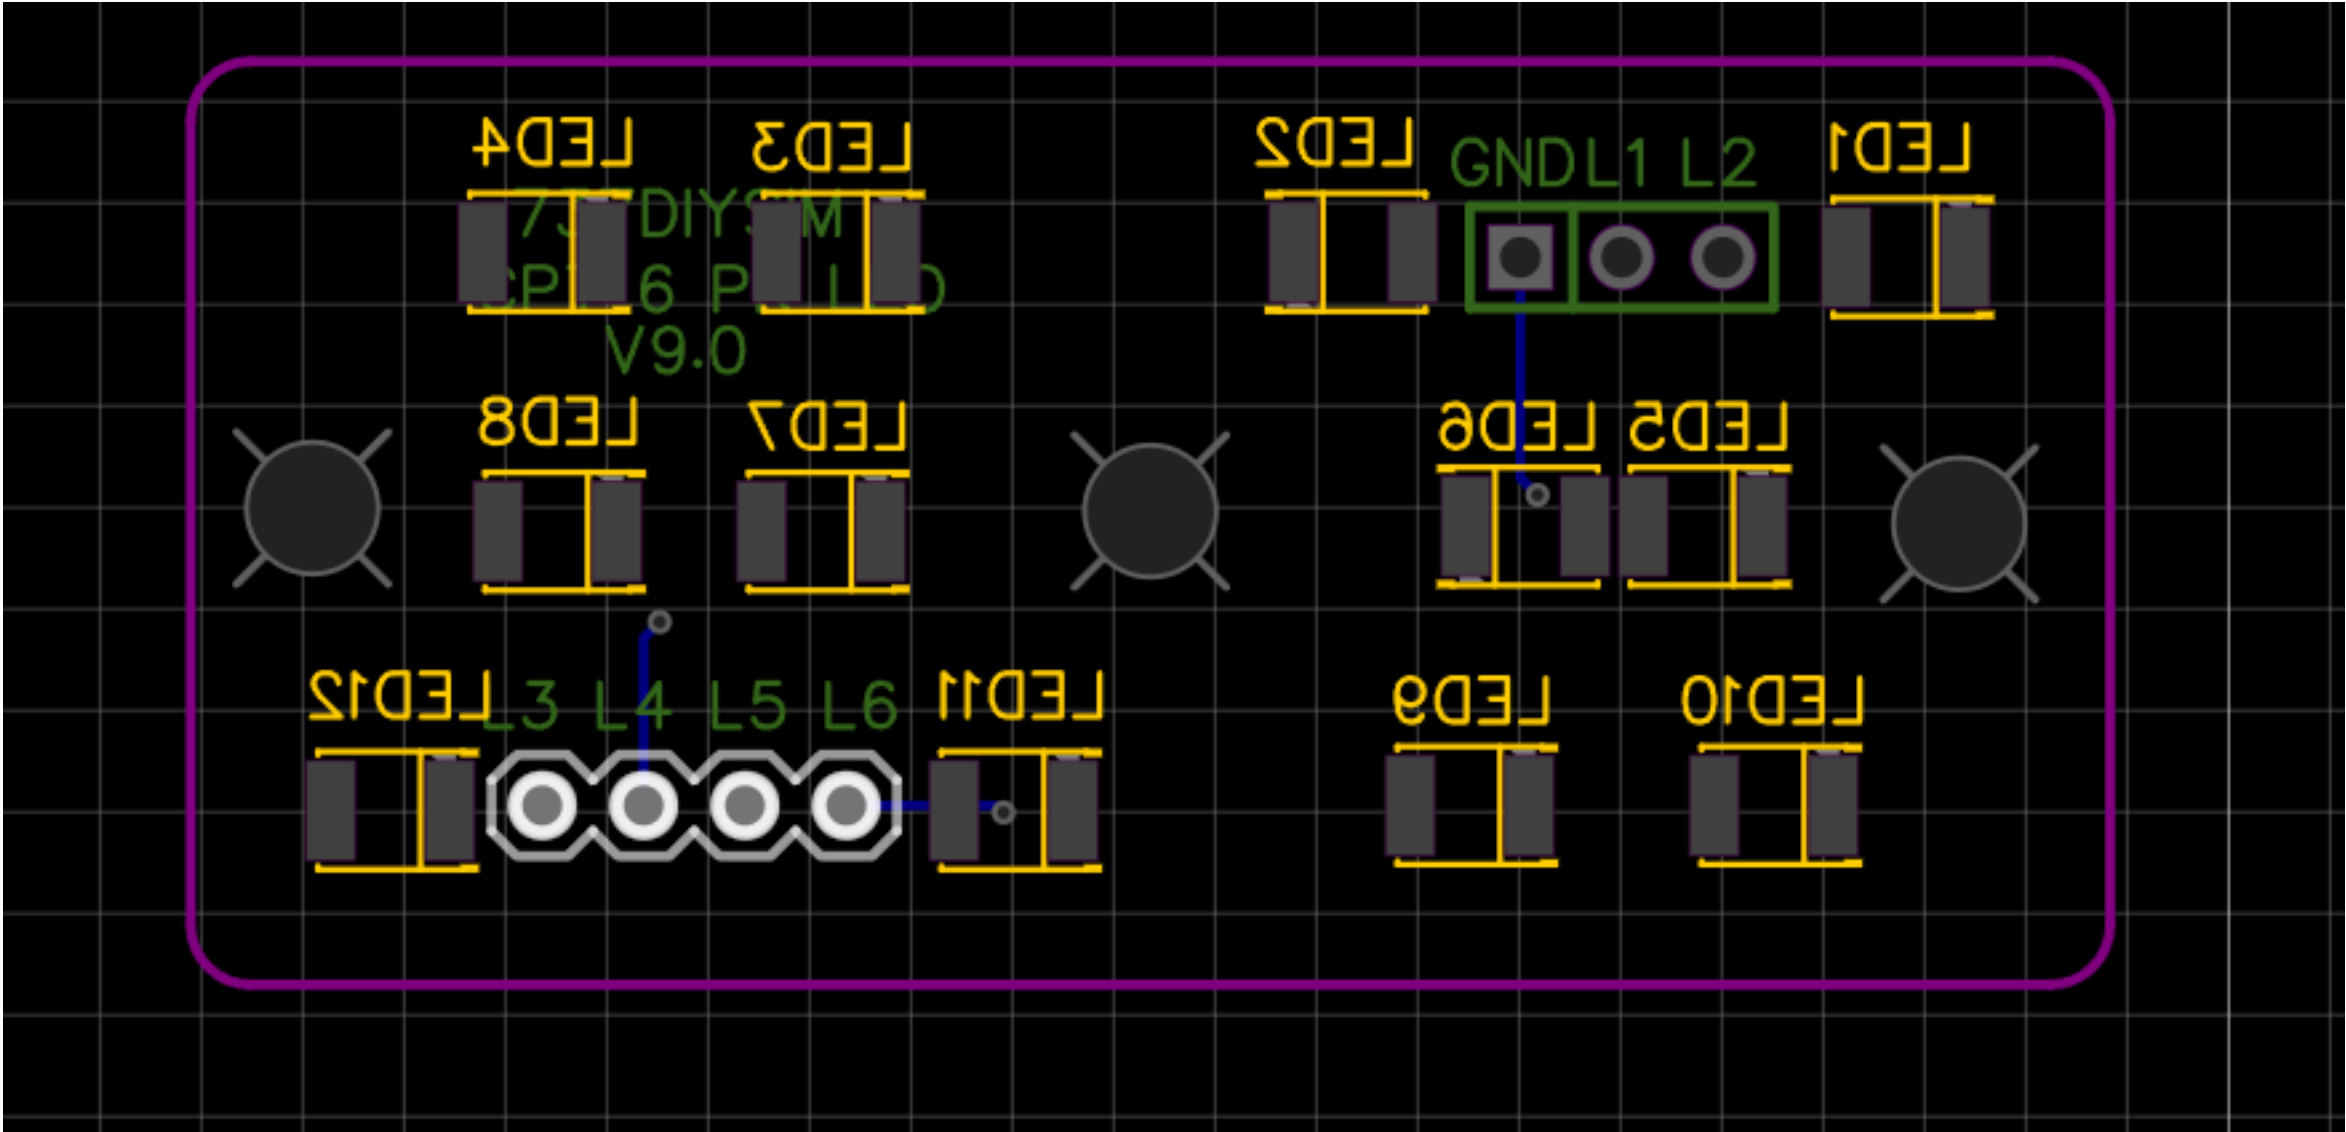

Please Note: This is for the commom Anode version,
where the indicated PCB ground is actually the +5V and the LEDS are switched grounds.
If you have the Orange LED version, then you must use 50 Ohm
Resistors (56 Ohm is the nearest)
If you have the White LED Version, then you must use 33 Ohm Resistors.

TITLE: Sheet_1		REV: 1.0
EasyEDA	Company: Your Company	Sheet: 1/1
	Date: 2024-04-01	Drawn By: 737diysim